


SPECIFICATIONS		
Lift capacity	12,000 lbs	5,443kg
Max lift height	55'	16.76m
Forward reach	38'	11.58m
Frame leveling L/R	11°	
Weight*	37,500 lbs	17,015kg
Engine (Cummins 3.8L)	120 hp (Tier 4F)	
Axles	Dana 213	
Transmission	Dana T20000	
Fuel capacity	72 gal	272.5L
Tires	foam filled 15.5 x 25	
Hydraulic flow (per min)	49 gal	185.4L
Hydraulic pressure	3,500 psi	241.3bar
Hydraulic oil capacity	58 gal	219.5L
Length to fork face	24' 8"	7.51m
Width	102"	2.59m
Height	8' 1"	2.46m
Wheelbase	141"	3.58m
Ground clearance	16.5"	419mm
Turning radius	14'	4.26m

*Weight based on open cab model with foam filled tires.

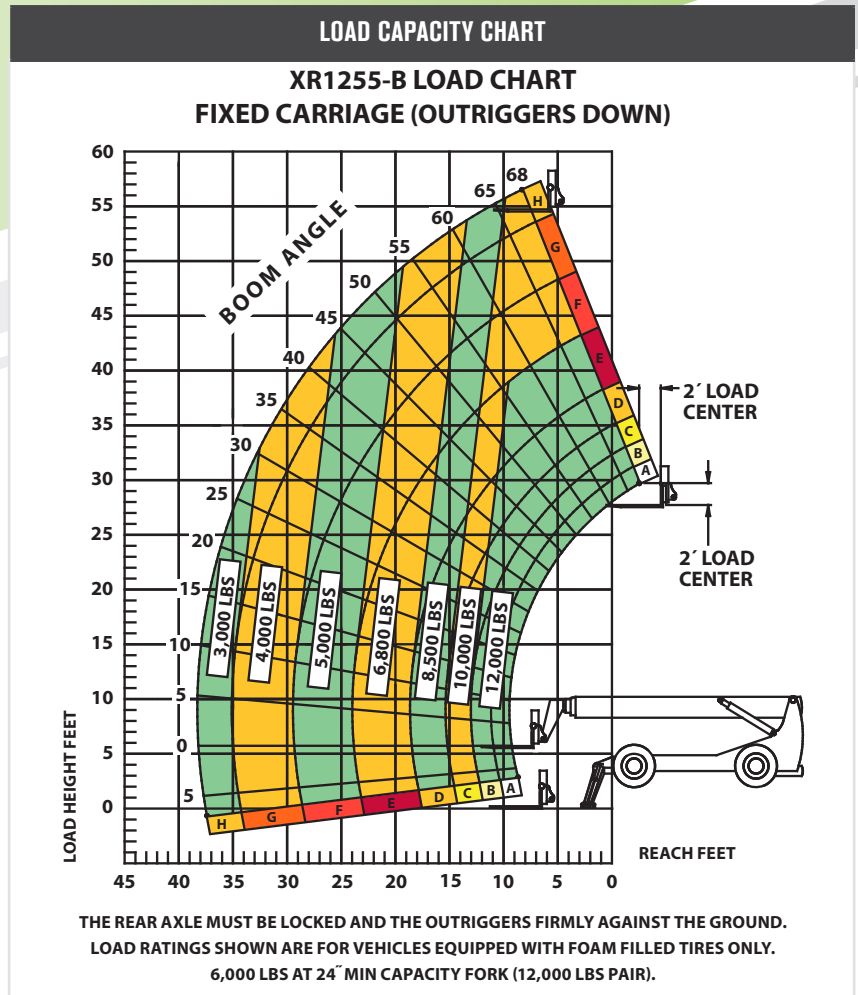

STANDARD FEATURES

360° operator visibility	Ductile steel manifold
Suspension seat	Easy cab mounted grab handles
Easy service access	Master disconnect switch
Protected tilt & extend cylinders	Boom lift point
Steel hydraulic & fuel tanks	Manual lowering valve (cylinders)
Long life Lexan labels	Large cross section boom
Heavy duty boom chains	Easy tie downs
Suspended pedals	"Y" frame handle
Large capacity fuel tank	Heavy duty pre-cleaner
Trunnion mounted sway cylinders	Additional high pressure hydraulic filter
Melonite pins	Steel hood
Standard auxiliary hydraulics	Solid steel plate chassis
Steel dash	Rear axle stabilization (RAS)
Center mounted powertrain	Wider outrigger stance
Long life boom rollers	Back up alarm with light
Dual batteries	Cab step